


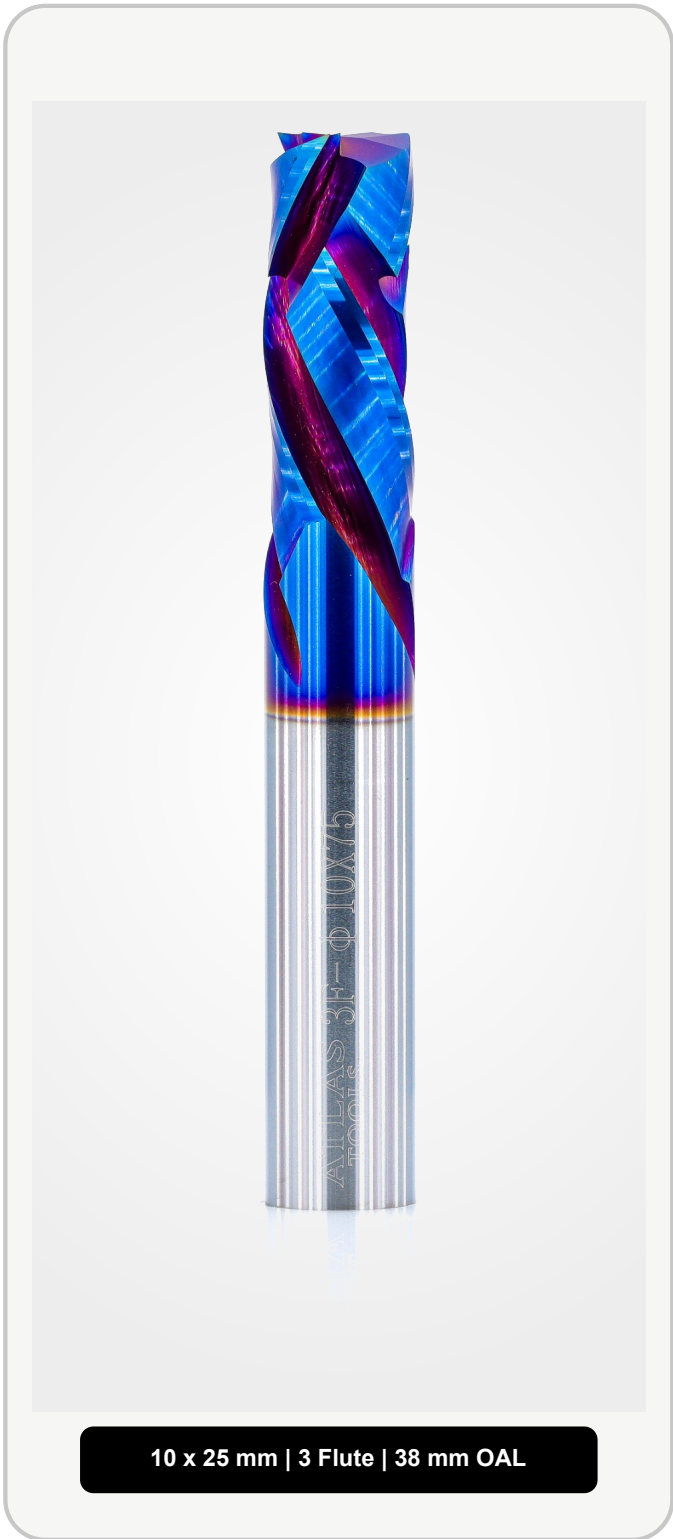

Compression Spiral Router Bit

10x25 3F - Nano Coating

Built for clean cutting, reliable tool life and professional results across plywood, MDF, solid timber, laminates and non-abrasive composites.

- **Compression geometry** - clean top and bottom edges.
- **Nano coating** - reduces friction and heat build-up.
- **3-flute finish** - smooth walls and stable routing.

Key Specifications

Diameter	10 mm
Cut Length	25 mm
Shank (Collet Size)	10 mm
Overall Length	38 mm
Flutes	3
Flute Style	Compression spiral geometry
Coating	Nano (NaCO)
Carbide Grade	Premium K180 carbide

Recommended Use

Best suited to CNC routing in plywood, MDF, solid timber, laminates, particleboard, Thermolite, foamed PVC, wood products and suitable non-abrasive composites.

- Production focus:** clean edges, smoother walls, reduced heat and consistent finish quality over long CNC production runs.

Product information compiled from Atlas Tools product listing and supplied product photo. Confirm specifications against current application requirements before machining.

Best practice

Keep stick-out minimal. Use rigid workholding, quality collets and lead-ins.

Atlas Tools

aidan@atlastools.co | +61 432 580 472
8 Ferguson St, Underwood QLD 4119



Product page